


**LV 50**



- - 
  - 
  -
- 20

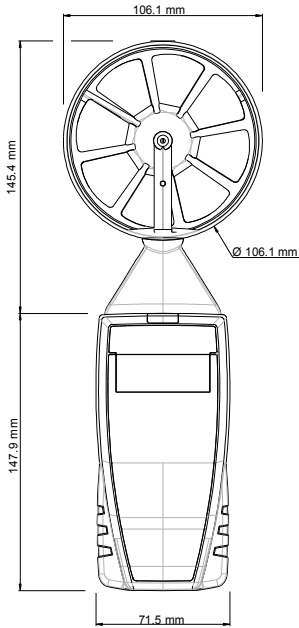

: ABS

: IP54

: 1 line

LCD 1 x 5 digits  
Size : 50 x 20 mm

**Height of digits :**  
Values : 9.2 mm  
Units : 4.7 mm

: 100 mm

: 200 g ( )



	°C, °F	m/s, fpm, km/h
	From -20 to +80 °C	From 0.3 to 35 m/s
	±0.4% of reading ±0.3°C	From 0.3 to 3 m/s : ±3% of reading ±0.1 m/s From 3.1 to 35 m/s : ±1% of reading ±0.3 m/s
	0.1 °C	From 0.3 to 3 m/s : 0.01 m/s From 3.1 to 35 m/s : 0.1 m/s
	T63 = 5	T63 = 4
	CTN	Hall effect sensor
		From 0 to +50 °C
		From -20 to +80 °C
		4 batteries AAA LR03 1.5 V
		70

Directives CEM 2004/108/CE and NF EN 61010-1

\* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation



(02-338-0023)

가 1

• On/Off/Hold  
LV50

• Select 가 1 가 2 가

• On/Off/Hold  
Hold 가

• Select 가

• On/Off/Hold

• Select  
• Select  
• Select

Select 가 : m/s, fpm, km/h.

• Select  
• Select  
• Select 가 : °C or °F.

• Select

• AAA LR03 1.5 V.

가

20

OFF



« Select »

« On/Off/Hold »



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



EXPORT DEPARTMENT  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : export@kimo.fr