


TK 50 – TK 52

-
-
-
- 가 20

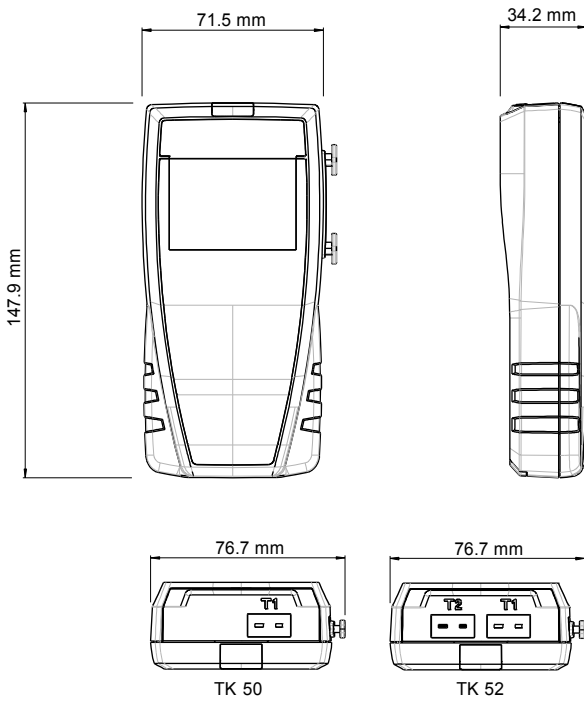

: ABS

: IP54

: 1 line

LCD 1 x 5 digits
Size : 50 x 20 mm

Height of digits :
Values : 9.2 mm
Units : 4.7 mm

: 200 g ()



Temperature	
	°C, °F
	Thermocouple K : from -200 to +1300 °C ; Thermocouple J : from -100 to +750 °C Thermocouple T : from -200 to +400 °C ; Thermocouple S : from 0 to +1760 °C
	Thermocouple K : ±1.1°C or ±0.4% reading value** ; Thermocouple J : ±0.8°C or ±0.4% reading value** Thermocouple T : ±0.5°C or ±0.4% reading value** ; Thermocouple S : ±1°C or ±0.4% reading value**
가	TK50 : 1 TK52 : 2
	0.1 °C
	T63 = 5
	Thermocouple K, J, T, S
	From 0 to +50 °C
	From -20 to +80 °C
	4 batteries AAA LR03 1.5 V
	180
	Directives CEM 2004/108/CE and NF EN 61010-1

All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation
** The accuracy is expressed either by a deviation in °C or by a percentage of the value concerned: only the bigger value is considered.



-
- ABS
-
-



(02-338-0023)

가 1

- **On/Off/Hold**
TK50 TK52
- **Select** 가 1 2 가 .(TK52)

- **On/Off/Hold**
- **Hold** 가
- **On/Off/Hold**

- « **Select** » « **On/Off/Hold** »
- « **Select** » (K,T,J,S) 가
- « **Select** » « **On/Off/Hold** »

- **Select** 가
- **Select** 가 :°C or °F.
- **Select**

-
- AAA LR03 1.5 V.
- 가

20

OFF



« Select »

« On/Off/Hold »



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr